REV.	RECORD/DATE	BY	APPD.
△			

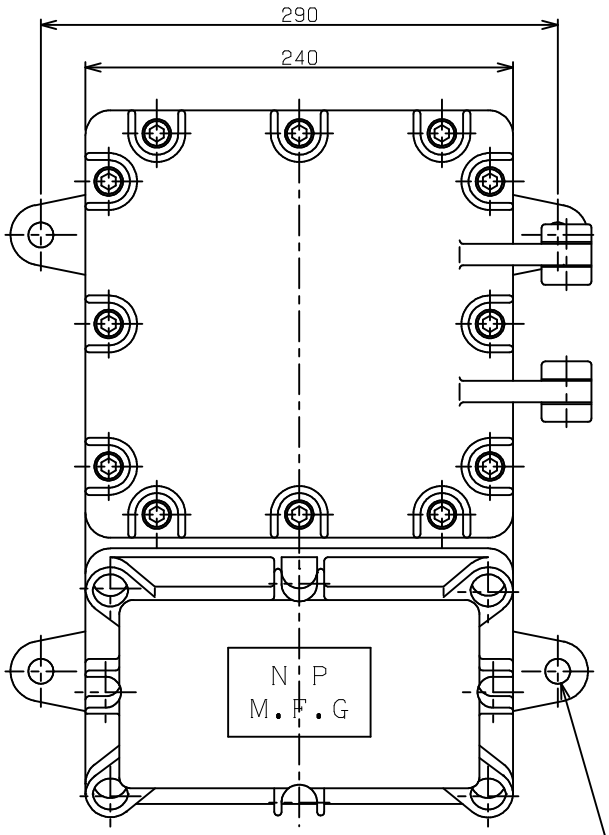

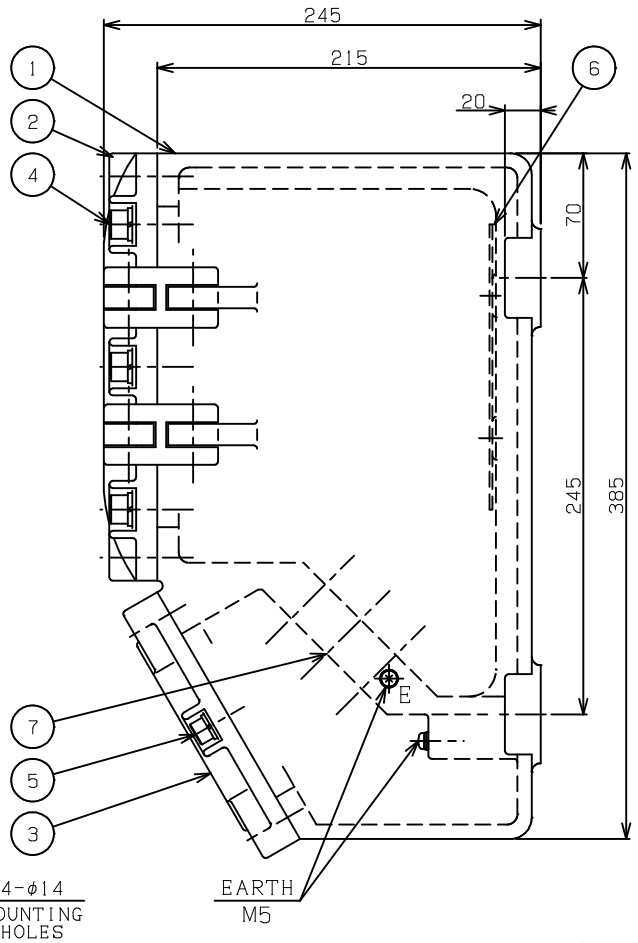

- MAIN CIRCUIT WIRING IV3.5sq.
- OPERATION CIRCUIT WIRING IV1.25sq.
- THERMAL RELAY AUTO RESET.

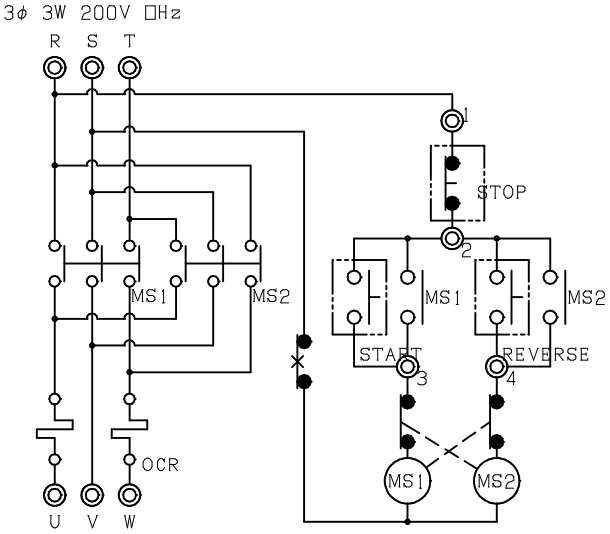

CONSTRUCTION ; d2G4
FINISHED COLOR(MUNSELL)
OUT SIDE ; 7.5BG6/1.5
IN SIDE ; 7.5BG6/1.5
WEIGHT ; 23 kg
QUANTITY ; PC
TEST CERTIFICATE
NUMBER ; No.T27606

TYPE	MOTOR CAPACITY	RATED CURRENT	ELECTORMAGNETIC SWITCH
SMG- 1-R	0.1 kw	0.7A	RSK-12JTC
SMG- 2-R	0.2 kw	1.2A	
SMG- 4-R	0.4 kw	2.3A	
SMG- 8-R	0.75kw	3.6A	
SMG-11-R	1.1 kw	5 A	
SMG-15-R	1.5 kw	6.7A	
SMG-22-R	2.2 kw	9.2A	
SMG-37-R	3.7 kw	15A	RSK-21JTC
SMG-55-R	5.5 kw	22A	RSK-26JTC
SMG-75-R	7.5 kw	30A	RSK-35JTC

PAT.No.	PARTS NAME	MATERIAL	QUANTITY	REMARKS
7	TER.STUD			MAX 11P
6	PLATE	SGCC	1	
5	TER BOLT	SUS304	8	M 8 WITH SW、PW
4	MAIN BOLT	SUS304	12	M10 WITH SW、PW
3	COVER 2	AC7A-F	1	
2	COVER 1	AC7A-F	1	
1	BODY	AC7A-F	1	

APPROVED	CHECKED	SCALE	TYPE
		1/3	SMG-1~75-R
DESIGNED	DRAWN	TITLE	FLAMEPROOF TYPE MAGNETIC SWICHES
SHIMADA ELECTRIC CO., LTD.		DRAWING No.	REV. △
		E D	